## New Updated Version: Cisco 300-208 Dumps VCE Free Download (161-170)

CISCIO NEW UPDATED: New Updated 300-208 Exam Questions from Braindump2go 300-208 PDF Dumps and 300-208 VCE Dumps! Welcome to Download the Newest Braindump2go 300-208 VCE&PDF Dumps:

http://www.braindump2go.com/300-208.html (89 Q&As) The 300-208 Exam Practice Questions and Answers are ideal for the aspring candiates to grab exceptional grades in Cisco 300-208 Exam! The 300-208 Questions and Answers are developed using the latest updated course content and all the answers are verified to ensure phenoment preparation for the actual 300-208 Exam! Vendor: CiscoExam Code: 300-208Exam Name: Implementing Cisco Secure Access Solutions300-208 sisas,300-208 sisas pdf,300-208 sisas book,300-208 sisas training,300-208 sisas implementing cisco secure access solutions,300-208 dumps,300-208 pdf,300-208 Book Implement

Questions and Ans Q&As
Updated: Oct 12, 20
\$429.99 \$99.

POF DEMO

QUESTION 161What endpoint operating system provides native support for the SPW? A. Apple iOSB. Android OSC. Windows 8D. Mac OS X Answer: A QUESTION 162Which condition triggers wireless authentication? A. NAS-Port-Type is set to IEEE 802.11.B. Framed-Compression is set to None.C. Service-Type is set to Framed.D. Tunnel-Type is set to VLAN. Answer: A QUESTION 163Which feature enables the Cisco ISE DHCP profiling capabilities to determine and enforce authorization policies on mobile devices? A. disabling the DHCP proxy optionB. DHCP option 42C. DHCP snoopingD. DHCP spoofing Answer: A QUESTION 164With which two appliance-based products can Cisco Prime Infrastructure integrate to perform centralized management? (Choose two.) A. Cisco Managed Services EngineB. Cisco Email Security ApplianceC. Cisco Wireless Location ApplianceD. Cisco Content Security ApplianceE. Cisco ISE Answer: AE QUESTION 165Which two options are EAP methods supported by Cisco ISE? (Choose two.) A. EAP-FASTB. EAP-TLSC. EAP-MS-CHAPv2D. EAP-GTC Answer: AB QUESTION 166You configured wired 802.1X with EAP-TLS on Windows machines. The ISE authentication detail report shows "EAP-TLS failed SSL/TLS handshake because of an unknown CA in the client certificates chain." What is the most likely cause of this error? A. The ISE certificate store is missing a CA certificate.B. The Wireless LAN Controller is missing a CA certificate.C. The switch is missing a CA certificate.D. The Windows Active Directory server is missing a CA certificate. Answer: A QUESTION 167What type of identity group is the Blacklist identity group? A. endpointB. userC. blackholeD. quarantineE. denied systems Answer: A QUESTION 168Which feature must you configure on a switch to allow it to redirect wired endpoints to Cisco ISE? A. the http secure-server commandB. RADIUS Attribute 29C. the RADIUS VSA for accountingD. the RADIUS VSA for URL-REDIRECT Answer: A QUESTION 169Lab SimThe Secure-X company has recently successfully tested the 802.1X authentication deployment using the Cisco Catalyst switch and the Cisco ISEv1.2 appliance. Currently, each employee desktop is connected to an 802.1X enabled switch port and is able to use the Cisco AnyConnect NAM 802.1X supplicant to log in and connect to the network. Currently, a new testing requirement is to add a network printer to the Fa0/19 switch port and have it connect to the network. The network printer does not support 802.1X supplicant. The Fa0/19 switch port is now configured to use 802.1X authentication only. To support this network printer, the Fa0/19 switch port configuration needs to be edited to enable the network printer to authenticate using its MAC address. The network printer should also be on VLAN 9. Another network security engineer responsible for managing the Cisco ISE has already per- configured all the requirements on the Cisco ISE, including adding the network printer MAC address to the Cisco ISE endpoint database and etc...Your task in the simulation is to access the Cisco Catalyst Switch console then use the CLI to:- Enable only the Cisco Catalyst Switch Fa0/19 switch port to authenticate the network printer using its MAC address and:- Ensure that MAC address authentication processing is not delayed until 802.1Xfails- Ensure that even if MAC address authentication passes, the switch will still perform 802.1X authentication if requested by a 802.1X supplicant- Use the required show command to verify the MAC address authentication on the Fa0/19 is successful The switch enable password is CiscoFor the purpose of the simulation, to test the network printer, assume the network

printer will be unplugged then plugged back into the Fa0/19 switch port after you have finished the required configurations on the Fa0/19 switch port. Note: For this simulation, you will not need and do not have access to the ISE GUI To access the switch CLI,

click the Switch icon in the topology diagram



Answer: Review the explanation for full configuration and solution. Initial configuration for fa 0/19 that is already done: interface FastEthe

description Emplo switchport access switchport mode a ip access-group B authentication ho authentication op authentication no au Best Edit Conso authentication ti dot1x pae authent dot1x timeout txspanning-tree por interface FastEthe

AAA configuration has already been done for us. We need to configure mac address bypass on this port to achieve the goal stated in the question. To do this we simply need to add this command under the interface:mabThen do a shut/no shut on the interface.

```
Verification: %LINK-5-CHANGED: Interface FastEthernet0/19, changed state to down %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/19, changed state
                                                            HQ-Sw(config-if)#end
HQ-Sw#show authentic
                                                                                    fig-if/mend
w authentication sessions interface fa 0/19
Interface: FastEthernet0/19
MAC Address: 0041.bf70.b5fb
IP Address: Unknown
Status: Running
Domain: UNKNOWN
urity Policy: Should Secure
urity Status: Unsecure
en host medie; multi-auth
                                                                            mmon Session ID:
Acct Session ID:
                                                                                                  State
Failed over
Autho Success
```

QUESTION 170Lab SimThe Secure-X company has started to tested the 802.1X authentication deployment using the Cisco Catalyst 3560-X layer 3 switch and the Cisco ISEv12 appliance. Each employee desktop will be connected to the 802.1X enabled switch port and will use the Cisco AnyConnect NAM 802.1X supplicant to log in and connect to the network. Your particular tasks in this simulation are to create a new identity source sequence named AD\_internal which will first use the Microsoft Active Directory (AD1) then use the ISE Internal User database. Once the new identity source sequence has been configured, edit the existing DotlX authentication policy to use the new AD\_internal identity source sequence. The Microsoft Active Directory (AD1) identity store has already been successfully configured, you just need to reference it in your configuration.

In addition to the above, you are also tasked to edit the IT users authorization policy so IT users who successfully authenticated will get the permission of the existing IT\_Corp authorization profile. Perform this simulation by accessing the ISE GUI to perform the following tasks:- Create a new identity source sequence named AD\_internal to first use the Microsoft Active Directory (AD1) then use the ISE Internal User database- Edit the existing Dot1X authentication policy to use the new AD\_internal identity source sequence:- If authentication failed-reject the access request- If user is not found in AD-Drop the request without sending a response-If process failed-Drop the request without sending a response- Edit the IT users authorization policy so IT users who successfully authenticated will get the permission of the existing IT\_Corp authorization profile. To access the ISE GUI, click the ISE icon in the topology diagram. To verify your configurations, from the ISE GUI, you should also see the Authentication Succeeded event for the it1 user after you have successfully defined the Dot1X authentication policy to use the Microsoft Active Directory first then use the ISE Internal User Database to authenticate the user. And in the Authentication Succeeded event, you should see the IT\_Corp authorization profile being applied to the it1 user. If your configuration is not correct and ISE can't authenticate the user against the Microsoft Active Directory, you should see the Authentication Failed event instead for the it1 user. Note: If you make a mistake in the Identity Source Sequence configuration, please delete the Identity Source Sequence then re-add a new one. The edit Identity

Source Sequence function is not implemented in this simulation.






Answer: Review the explanation for full configuration and solution. Step 1: create a new identity source sequence named AD\_internal which will first use the Microsoft Active Directory (AD1) then use the ISE Internal User database as shown below:





Step 2: Edit the existing Dot1x policy to use the newly created Identity Source: Then hit Done and save. Braindump2go New Published Exam Dumps: Cisco 300-208 Practice Tests Questions, 194 Latest Questions and Answers from Official Exam Centre

Guarantee You a 100% Pass! Free Download Instantly!

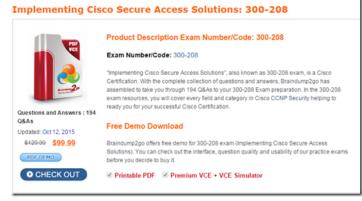

FREE DOWNLOAD: NEW UPDATED 300-208 PDF Dumps & 300-208 VCE Dumps from Braindump2go: http://www.braindump2go.com/300-208.html (194 Q&A)